


Drilling Pipe

Mud Drill pipe is a kind of piping used on a drilling rig. It assists with wellbore drilling, which is the process of digging a hole in the ground so as to get a particular natural resource, such as oil or water or gas. The pipe pumps drilling fluid, which generates pressure to keep unwanted fluids out of the liquid pumped, removes drill cuttings, and helps to cool and clean the drill bit. Most drill pipes are made of a thick layer of steel. There are usually about 30 to 33 feet (9.1 to 10 meters) long, though they come in several lengths. They also come in several different weights and strengths in order to accommodate a wide array of rig sizes.

General Features

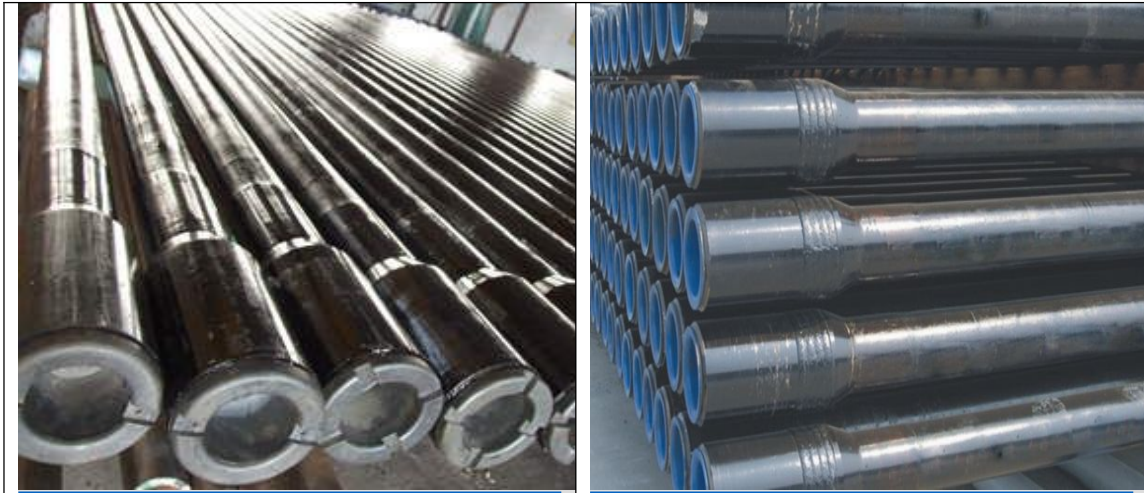

ZG series Drill Pipe are used for multiple drilling operations. Suitable for onshore or offshore drilling operations.

Details

The ZG series [oilfield drill pipe](#) were developed to provide the market with more reliable technology and more hoisting performance. It is special kind of industrial tubular widely used for drilling operation. Featured with various sizes and weights for selection. Included but not limited by the advantages mentioned, ZG series drill pipe might be your best choice.

General Features

- Manufactured according to API 5D, API 7-1
- Suitable for onshore or offshore rigs
- Suitable for cold area and desert environment

Main Parameters

Size: 2-3/8" – 6 – 5/8" (60.32 mm – 168.3 mm)

Parameters:

Nominal Spec.		Drill Pipe body				Tool joint									
Size (in)	W/T (ppf)	Grade	Up-set	O.D. (mm)	Wall (mm)	RSC Type	O.D. (mm)	I.D. (mm)	Bevel Dia. of Shoulder DF (mm)	Pin Tong (mm)	Box Tong (mm)	O.D. of Upset Neck (mm)	Torsion		
2-3/8	6.65	E	EU	60.32	7.11	NC26	85.7	45.45	82.95	177.8	203.2	65.09	1.1		
		X					85.7	45.45	82.95	177.8	203.2	65.09	0.87		
		G					85.7	45.45	82.95	177.8	203.2	65.09	0.79		
2-7/8	10.4	E	EU	73.02	9.19	NC31	104.8	53.98	100.41	177.8	228.6	80.96	1.03		
		X					104.8	50.8	100.41	177.8	228.6	80.96	0.9		
		G					111.1	50.8	100.41	177.8	228.6	80.96	0.82		
		S						41.28	100.41	177.8	228.6	80.96	0.82		
3-1/2	13.3	E	EU	88.9	9.35	NC38	120.7	68.26	116.28	203.2	266.7	98.43	0.98		
		X					127	65.09	116.28	203.2	266.7	98.43	0.87		
		G					127	61.91	116.28	203.2	266.7	98.43	0.86		
		S					127	53.98	116.28	203.2	266.7	98.43	0.8		
	15.5	S					NC40	127	65.09	116.28	203.2	266.7	98.43	0.97	
								X	127	61.91	116.28	203.2	266.7	98.43	0.83
								G	127	53.98	116.28	203.2	266.7	98.43	0.9
								S	139.7	57.15	127.4	177.8	254	98.43	0.87
4	14	E	IU	101.6	8.38	NC40	133.4	71.44	127.4	177.8	254	106.36	1.01		
		X					133.4	68.26	127.4	177.8	254	106.36	0.86		
		G					139.7	61.91	127.4	177.8	254	106.36	0.93		
		S					139.7	50.8	127.4	177.8	254	106.36	0.87		
	25.6	E					NC46	152.4	82.55	145.26	177.8	254	114.3	1.43	
								X	152.4	82.55	145.26	177.8	254	114.3	1.13
								G	152.4	82.55	145.26	177.8	254	114.3	1.02
								S	152.4	76.2	145.26	177.8	254	114.3	0.94
4.5	16.6	E	IEU	114.3	8.56	NC46	158.8	82.55	145.26	177.8	254	119.06	1.09		
		X					158.8	72.6	145.26	177.8	254	119.06	1.01		
	25.6	G					177.8	95.25	170.7	203.2	254	130.18	1.09		
		S					184.2	88.9	170.7	203.2	254	130.18	0.98		
		25.6	E			12.7		177.8	88.9	170.7	203.2	254	130.18	1.21	
			X					177.8	88.9	170.7	203.2	254	130.18	0.95	

		G					184.2	88.9	170.7	203.2	254	130.18	0.99
		S					184.2	82.55	170.7	203.2	254	130.18	0.83
5- 1/2	21.9	E	IEU	139.7	9.17		177.8	101.6	170.7	203.2	254	144.46	1.11
		X					177.8	95.25	170.7	203.2	254	144.46	0.98
		G					184.2	88.9	170.7	203.2	254	144.46	1.02
		S					190.5	76.2	180.2	203.2	254	144.46	0.96
	24.7	E			177.8		101.6	170.7	203.2	254	144.46	0.99	
		X			184.2		88.9	170.7	203.2	254	144.46	1.01	
		G			184.2		88.9	170.7	203.2	254	144.46	0.92	
		S			190.5		76.2	180.2	203.2	254	144.46	0.86	
6- 5/8	25.2	E	IEU	168.3	8.38	6- 5/8FH	203.2	127	195.7	203.2	279.4	176.21	1.04
		X					203.2	127	195.7	203.2	279.4	176.21	0.82
		G					209.6	120.65	195.7	203.2	279.4	176.21	0.87
		S					215.9	107.95	195.7	203.2	279.4	176.21	0.86
	27.7	E			203.2		127	195.7	203.2	279.4	176.21	0.96	
		X			209.6		120.65	195.7	203.2	279.4	176.21	0.89	
		G			209.6		120.65	195.7	203.2	279.4	176.21	0.81	
		S			215.9		107.95	195.7	203.2	279.4	176.21	0.81	