


## Overshot

Overshot, a new type of [fishing tools](#), has many strengths owned by various overshot. Though most overshot is applied in fishing, the overshot also can be used for coil tubing or drill pipe operations. When the overshot is used in conjunction with drill pipe or in certain coil tubing operations it can be released by right hand rotation. Overshot, is fitted with threads or another shape that "swallows" the fish and does not release it as it is pulled out of the hole. Overshot is also fitted with a crude drilling surface at the bottom, so that the overshot may be lightly drilled over the fish, sometimes to remove rock or metallic junk that may be part of the sticking mechanism.

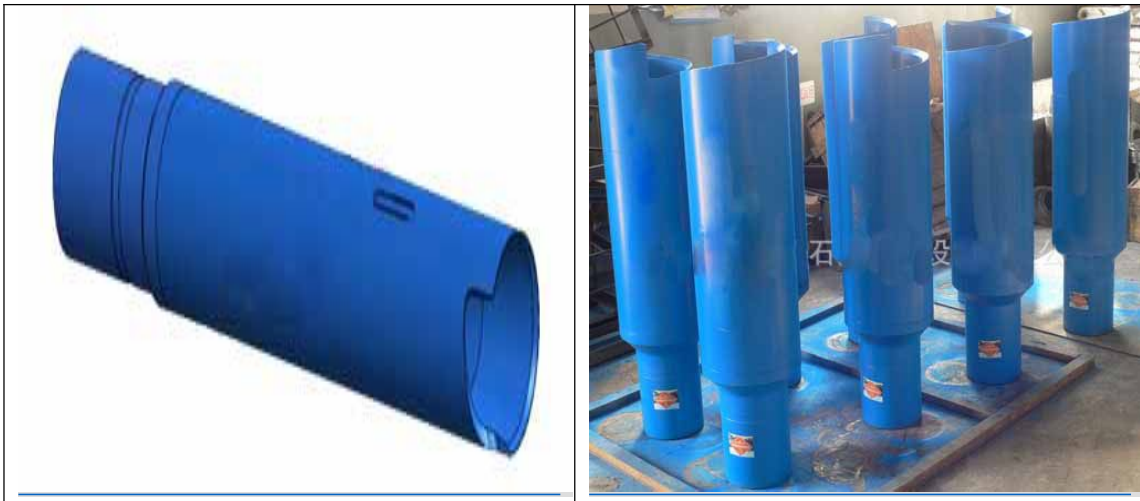

LT series [Overshot](#) are special tools for fishing tools and tubes with smooth external surface. Suitable for onshore and offshore fishing operations.

### Details

The LT series overshot were developed to provide the market with more reliable technology and more hoisting performance. Used for catching the fish with smooth external surface. It is designed based on the outer diameters of various drill collars, drill strings, [oil tubing](#), subs, clumps and other down-hole tubes. We supply series of overshots for fishing operation of different diameters. Included but not limited by the advantages mentioned, LT series overshot might be your best choice.

### General Features

- Suitable for cold area and desert environment
- Suitable for onshore or offshore operations
- Wide range of selection for different operations

## Main aramaters

Outside Diameter: 3-1/2" – 13-3/4" (89 mm - 350 mm)

### Parameters:

Type	O. D (mm)	Size of Fish		Thread
		Spiral Grapple	Basket Grapple	
LT-T89	89	60.3	47.6	NC26
LT-T92	92	73	63.5	NC26
LT-T95	95	76.2	66.6	NC26
LT-T102	102	73	60.3	NC26
LT-T105	105	85.7	73	NC31
LT-T114	114	89	75	NC31
LT-T117	117	89	78	NC31
LT-T127	127	95	80	NC38
LT-T143	143	120.6	102	NC38
LT-T152	152	128	111	NC38
LT-T168	168	127	114	NC50
LT-T168B	168	139.7	120.6	NC50
LT-T181	181	146	127	NC50
LT-T194	194	159	141	NC50
LT-T200	200	159	141	NC50
LT-T206	206	178	163	NC50
LT-T206A	206	168	152	NC50
LT-T219	219	178	159	NC50
LT-T232	232	203	187	NC50
LT-T244	244	206	184	6 5/8 REG
LT-T260	260	219	200	6 5/8 REG
LT-T270	270	228.6	209.6	6 5/8 REG
LT-T273	273	241.3	216	6 5/8 REG
LT-T286	286	244.5	225.4	6 5/8 REG
LT-T298A	298	257	238.1	6 5/8 REG
LT-T340	340	286	260	6 5/8 REG